

# Instruction for use Multi-Cleaner „Hydrobroom“ BR-200



## I. Safety instructions

1. Read the instructions before using for the first time.
2. Never point the Multi-Cleaner cleaning jet at people, animals or electric appliances.
3. Do not put your hand into the high-pressure jet.
4. Make sure that children (or minors) are not using the appliance or are not in the proximity of the area being worked on.
5. Protect the appliance from frost.

## II. Starting the appliance

1. Switch on high pressure cleaner and with the spray gun open, flush through without the lance.
2. Connect high-pressure lance or spray gun by turning or clicking. If necessary screw on with the adapter. The adapter with the bayonet joint can only be tightened after the adjusting of the fastening nipples.
3. Lift the Multi-Cleaner from the floor. Press the pistol to check that the main nozzle functions. (The nozzle must oscillate quickly).
4. With sensitive surfaces such as wood move the appliance steadily over the area which is being cleaned and repeat this movement as you would with a household vacuum-cleaner. In this way it cleans evenly and you can constantly check the cleaning results.
5. The protective cover (Position A) rotates by 270° so that it can clean corners, edges, front surfaces etc without spraying. The "Blow-Away-Cover" (Position B) should be opened when working with large pieces of dirt but it should, however, be closed when spray protection is necessary. When cleaning corners swing the protective cover slightly backwards and at an angle of 45° lift it slightly from the corner and then reposition it again as before. With front surfaces such as with steps or walls the protective cover should be positioned at 90° in order to reduce the spraying.
6. In order to clean surfaces which are inaccessible or (open areas) you can remove the flat rotation nozzle from the Multi-Cleaner with the Quick-Snap function (Position C) and so having more free movement. (In order to remove the nozzle, the two red flaps must be pressed simultaneously).
7. (Position E) Wear-resistant runners, replaceable (see the parts list).

## Examples of usage

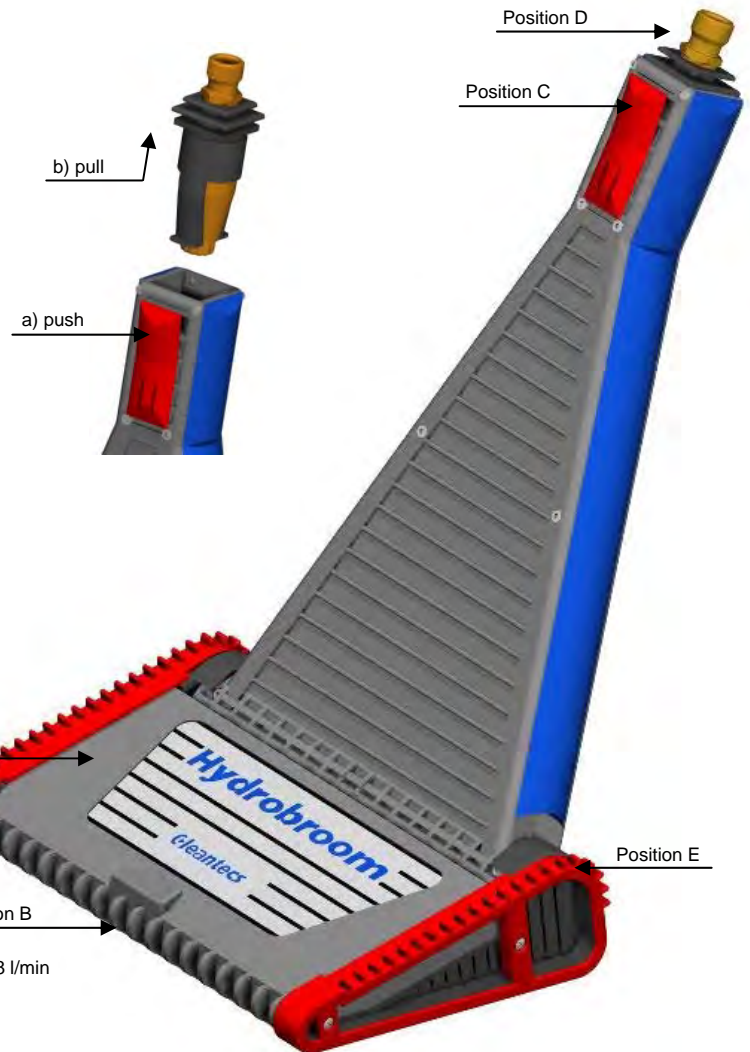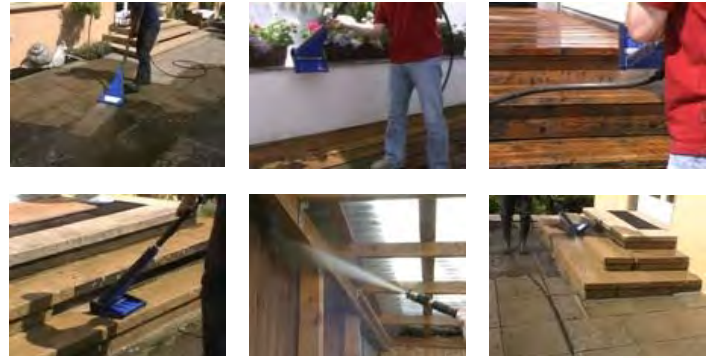

**Beware very strong jet steams.**  
Please read the safety instructions above.

**Uneven cleaning can result when working on roughcast, plaster walls.**

### Technical Data:

Type BR-200 ceramic nozzle max press.: 210 bar temperature: 90 °C 18 l/min

### Care and Maintenance:

The Multi-Cleaner should be cleaned when cleaning phase is ended.  
The main nozzle can be pulled off with the Quick-Snap-System and the large pieces of dirt can be removed by flushing the case through thoroughly. (external and internal)

### Warning:

Do not clean the case on its head with the main nozzle attached, as the dirt would then flush into the nozzle.

### Defects:

High pressure cleaner pulsates.  
High-pressure cleaner pulsates after a few minutes:

Nozzle does not move:

Main nozzle is too small.  
Main nozzle, or coupling filter (Position D) is dirty.  
Main nozzle is dirty.

Hofackergasse 3  
D-89250 Senden - Hittistetten

Tel. +49 (0)7307 – 9265 0  
Fax +49 (0)7303 – 9265 20  
E-Mail: info@cleantecs.de  
www.cleantecs.de

**Cleantecs**