





SPECIFICHE TECNICHE – SPECIFICATIONS

– PRESSIONE NOMINALE RATED PRESSURE	24 bar – 2.4 MPa (350 PSI)
– PORTATA MASSIMA MAX FLOW RATE	60 l/min (16 GPM)
– TEMPERATURA MASSIMA MAX WORKING TEMPERATURE	90° C (195 °F)
– FATTORE DI PORTATA FLOW FACTOR	FP. 60
– FORZA APERTURA LEVA TRIGGER APERTURE FORCE	30 N (6.6 lbf.)
– FORZA MANTENIMENTO LEVA TRIGGER HOLDING FORCE	10 N (2.2 lbf.)

MISURE D'INGOMBRO – OVERALL DIMENSIONS

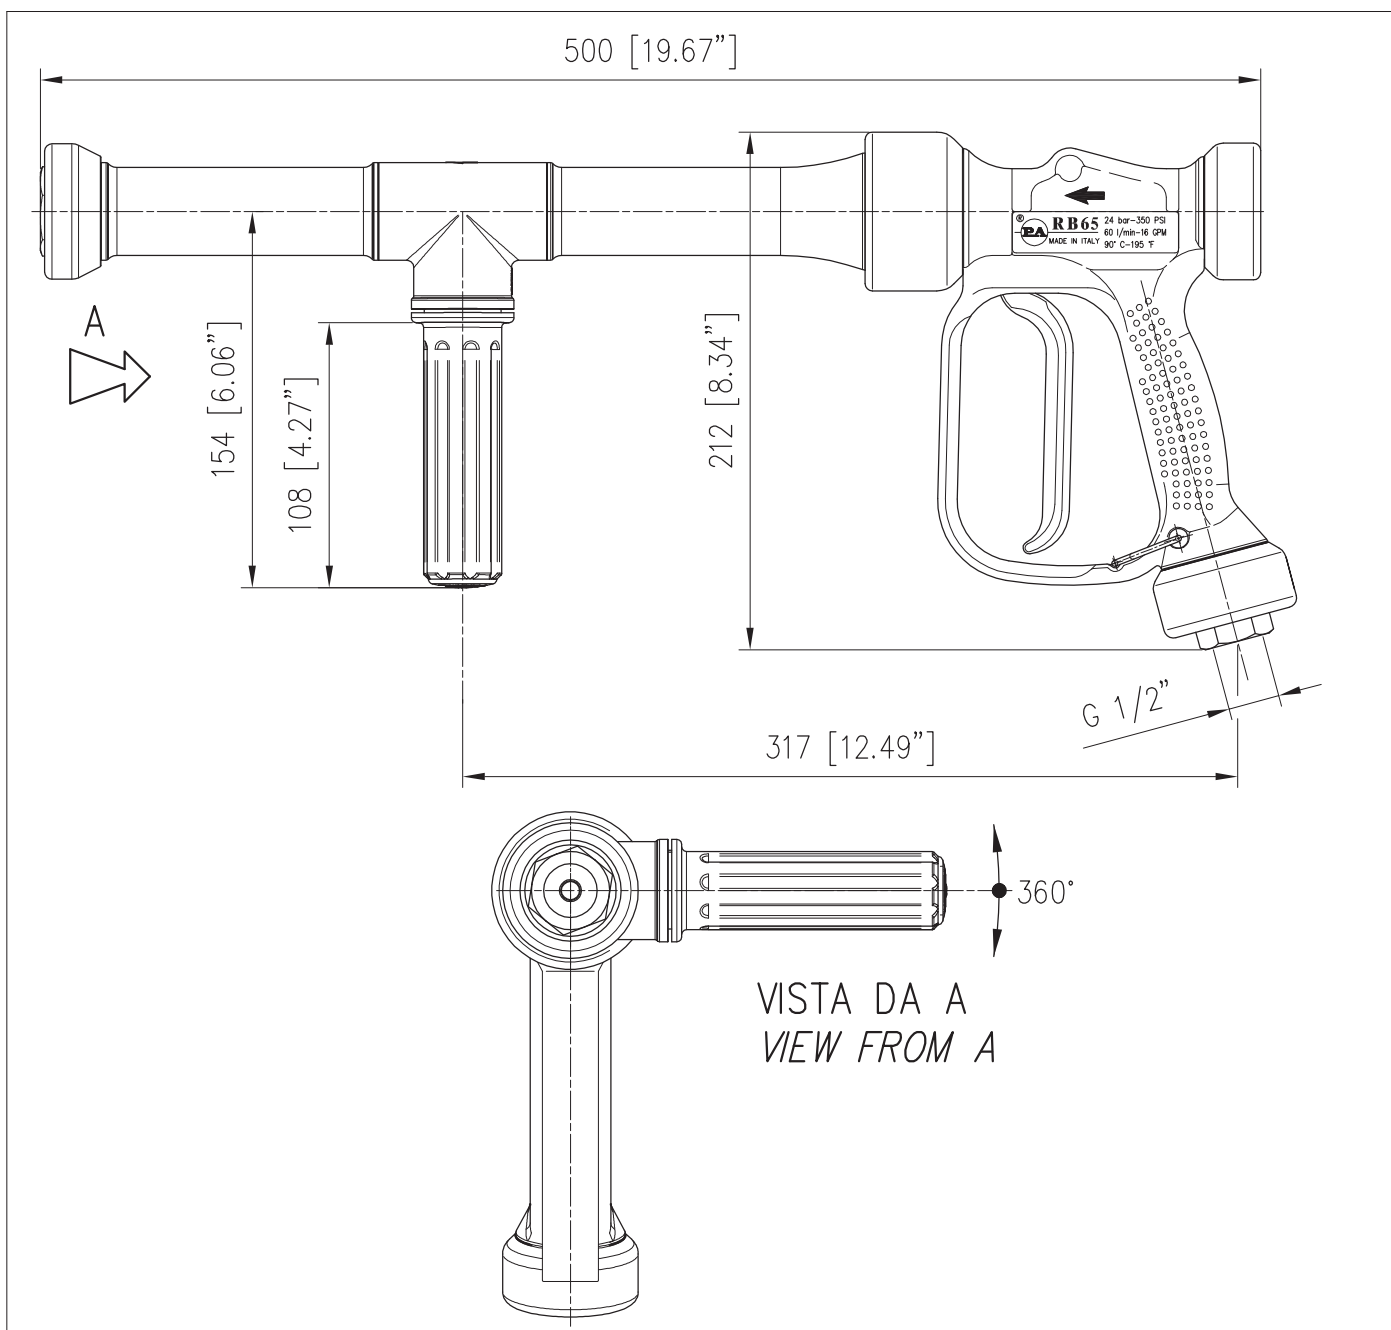

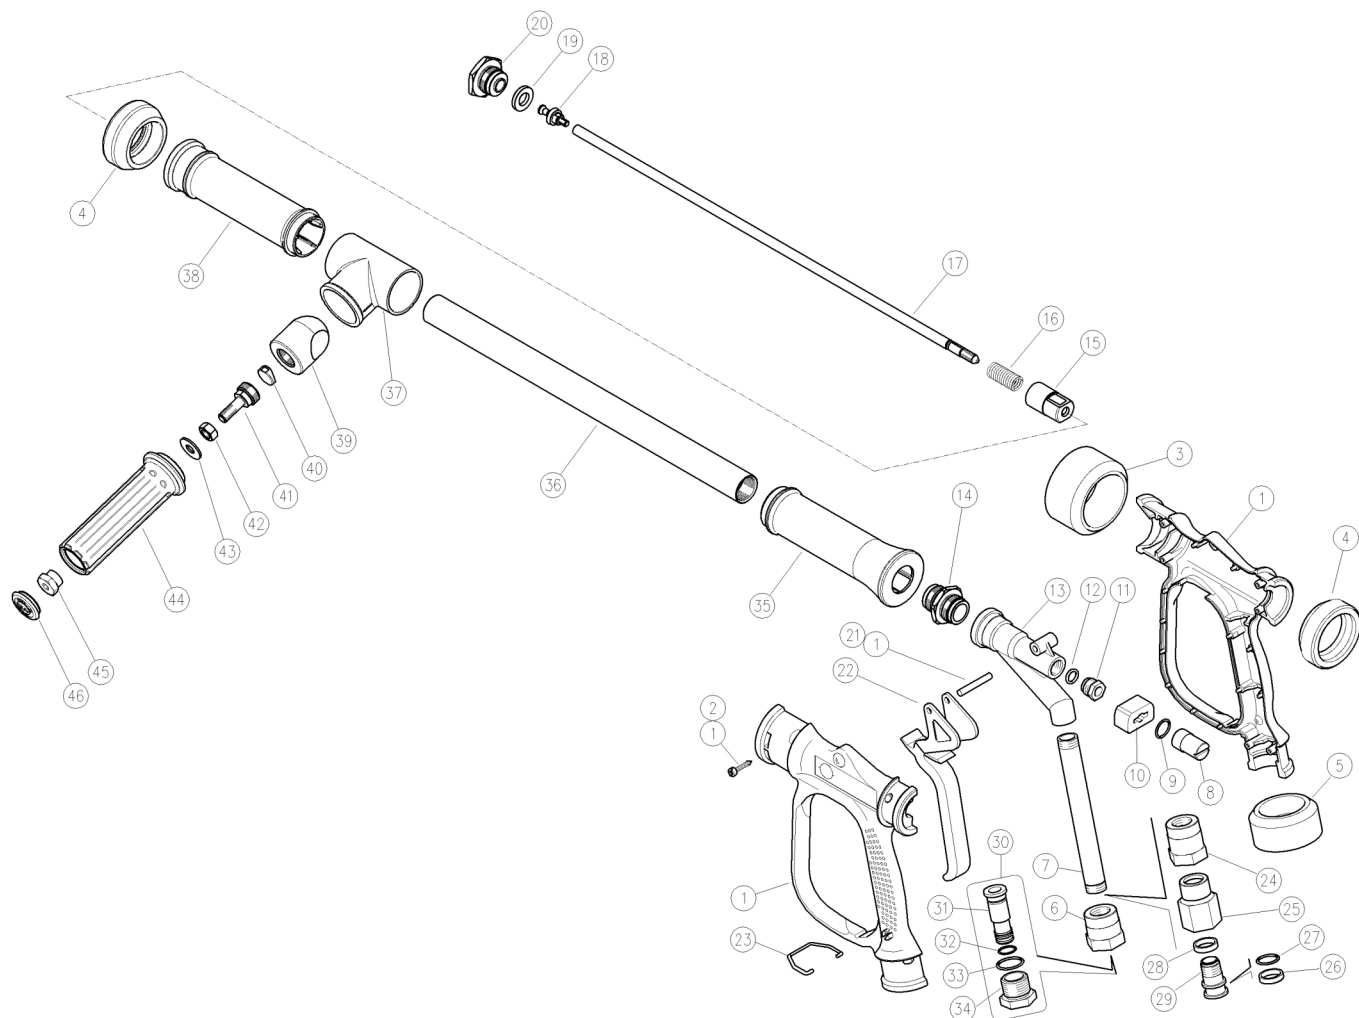30.6465.00 RB65-350-blue spray gun,brass 1/2F Bsp
30.6468.00 RB65-350-red spray gun,brass 1/2F Bsp


Pos.	P/N	Description	Q.ty	K1	K2	K3	K4
1	30.6420.24	Casing-kit -RB65-60L +screws, Sst. v.2 (1)	1				1
1	30.6491.24	Casing-kit -RB65 red+scr. (2)	1				1
2	16.3075.51R	S/tapping scr. 3,5x18 mm sst.	6				10
3	30.6412.85R	Front guard ring, TPEs blue v.2 (1)	1				5
3	30.6467.85R	Front guard ring, TPEs red v.2 (2)	1				5
4	30.6413.85R	Back guard ring, TPEs blue v.2 (1)	2				5
4	30.6466.85R	Back guard ring, TPEs red v.2 (2)	2				5
5	30.6414.85R	Lower guard ring, TPEs blue v.2 (1)	1				5
5	30.6469.85R	Lower guard ring, TPEs red v.2 (2)	1				5
6	30.6407.31R	Coupl., M16x1,5F-1/2F Bsp brass	1				5
7	30.6409.36R	Tube, M16x1,5 FF 130 mm brass	1				5
8	30.6418.31R	Regulating pin, M7	1				10
9	10.3064.10R	O-ring 1.78 x 14 mm Viton	1	•			10
10	30.6404.84R	Sliding block, PA blue (1)	1				10
10	30.6443.84R	Sliding block, PA red (2)	1				5
11	30.6417.31R	Plug, M14x1 M brass	1				10
12	10.3170.10R	O-ring, 2,62x7,6 mm Vi 70	1	•			10
13	30.6405.35R	Housing -RB65, brass	1				3
14	30.6475.31R	Coupler M22 MM brass	1				3
15	30.6472.31R	Spring spacer, brass	1				3
16	30.6454.51R	Spring, 2x12,9x40 mm Sst.	1				5
17	30.6473.31R	Brass pin 451 mm	1				3
18	30.6471.31R	Piston -RB65, 14 mm, brass	1				3
19	30.6408.85R	Front seal, 11x20,5x3 mm FKM80	1	•			10
20	30.6403.31R	Front Coupl. -RB65, brass 60L/min	1				5
21	30.6428.31R	Parallel pin, 5x38 mm brass	1				10
22	30.6411.84R	Trigger -RB65, PA blue (1)	1				10
22	30.6444.84R	Trigger -RB65, PA red (2)	1				5
23	30.6415.51R	Trigger retainer, Sst.	1				5

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4
24	30.6426.31R	Coupl. -SW, M15x1F-M16x1,5F	1				3
25	30.6427.31R	Coupl. -SW, 1/2F Bsp	1				5
26	26.1075.85R	Bushing, open 15,5x19x4mm	1				10
27	10.3092.10R	O-ring, 2x15 mm Vi 70	1				10
28	26.1074.85R	Bushing, 15,5x19x4 mm PTFE	1				10
29	26.1072.31R	Pin, M15x1-19 mm brass	1				10
30	30.6430.00	Swivel, brass-13mm h.barb	1				10
31	30.6431.31R	13mm hose barb, brass	1				3
32	10.3060.00R	O-ring, 1,78x12,42 mm	1				10
33	10.3092.90R	O-ring, 2x19 mm	1				10
34	30.6432.31R	Coupl. -SW, 1/2M Bsp brass	1				3
35	30.6461.84R	Front external cover -RB65, plastic, blue (1)	1				3
35	30.6462.84R	Front external cover -RB65, plastic, red (2)	1				3
36	30.6477.36R	Tube, D.24 mm -L.350mm brass	1				3
37	30.6489.84R	T-Protection -RB65, plastic, blue (1)	1				3
37	30.6490.84R	T-Protection -RB65, plastic, red (2)	1				3
38	30.6448.84R	External protection -RB65 plastic, blue (1)	1				5
38	30.6449.84R	External protection -RB65 plastic, red (2)	1				3
39	30.6474.31R	Tube fastener, brass	1				3
40	30.6486.84R	Spacer, plastic	1				3
41	30.6476.51R	Screw M8-M18 Stainless steel	1				3
42	11.4574.11R	Hex. nut, M8, Sst.	1				10
43	14.3650.00R	Washer, 8,4x17x1,6 mm Sst.	1				10
44	30.6487.84R	Knob, 32x115 mm PP blue (1)	1				3
44	30.6488.84R	Knob, 32x115 mm PP red (2)	1				3
45	41.0410.31R	Special nut, M8 brass	1				5
46	30.6478.84R	Plug, Knob PP blue (1)	1				5
46	30.6479.84R	Plug, Knob PP red (2)	1				3

Kit	P/N	Description	
K1	30.6422.24	Seals spares kit -RB65, 3x1pcs.	1
(1) 30.6465.00 (2) 30.6468.00			