

	EQUIPAGGIAMENTI TECNICI LAVAGGIO	LS 10 LANCIA SCHIUMA CON SERBATOIO FOAMER WITH TANK		3	
					
					26/02/16



SPECIFICHE TECNICHE
SPECIFICATIONS

- PRESSIONE NOMINALE RATED PRESSURE	200 bar – 20 MPa (2900 psi)
- PRESSIONE CONSENTITA PERMISSIBLE PRESSURE	220 bar – 22 MPa (3200 psi)
- PORTATA MASSIMA MAX FLOW RATE	VEDI DIAGRAMMA SEE CHART BELOW
- TEMPERATURA MASSIMA MAX WORKING TEMPERATURE	60° C (140 °F)


MISURE D'INGOMBRO
OVERALL DIMENSIONS

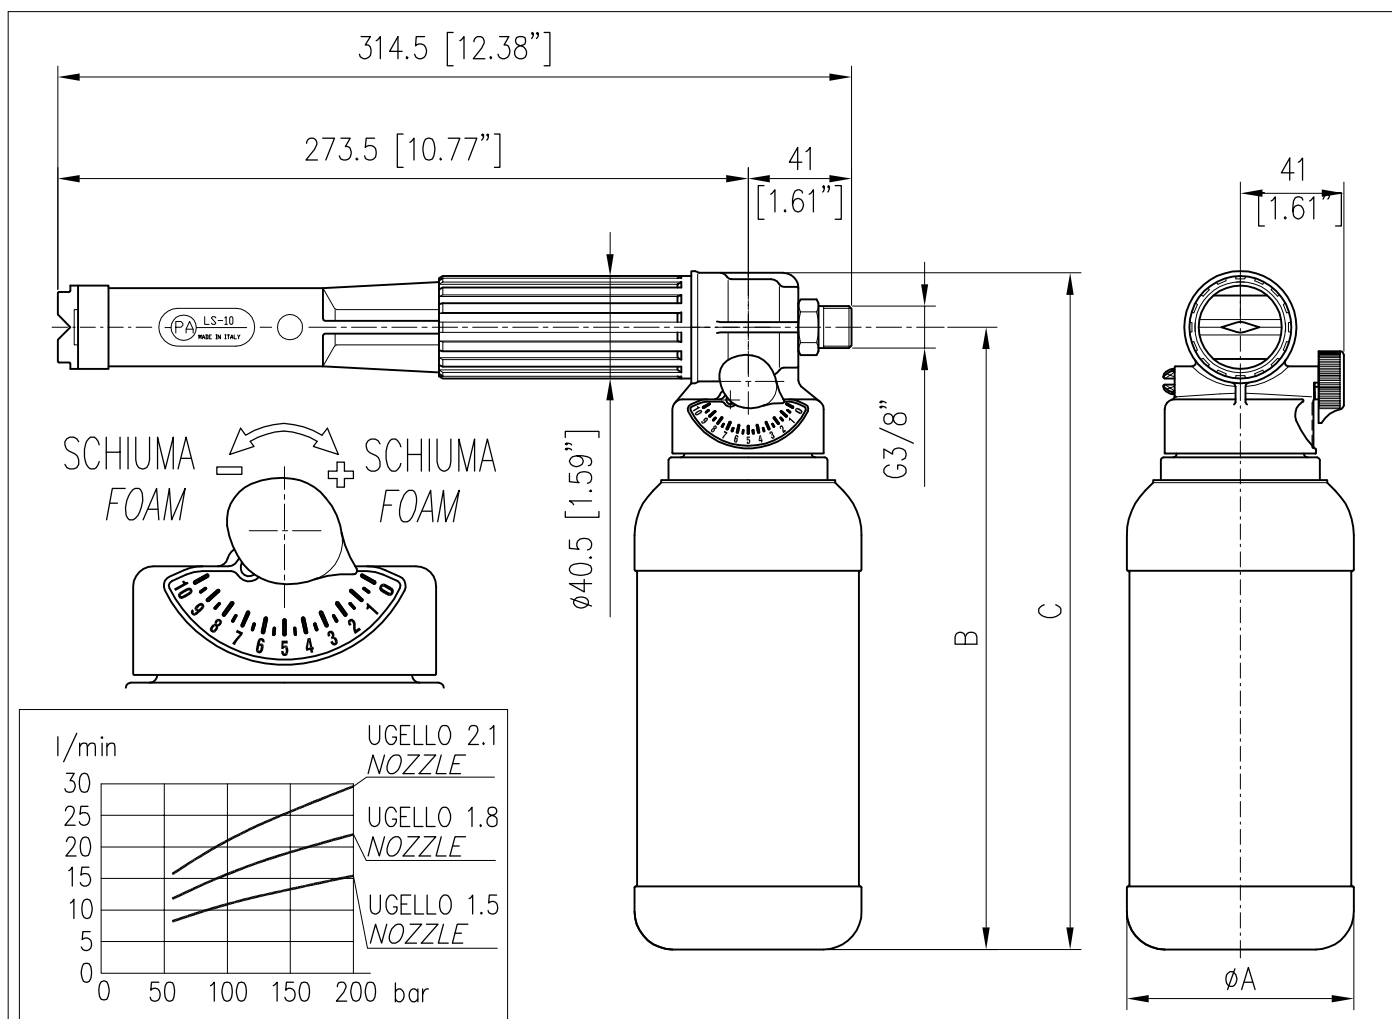

CODICE CODE	UGELLO NOZZLE	A	B	C	SERBATOIO TANK
25.1865.65	ø1.5 [0.06"]	ø90 [3.54"]	247 [9.72"]	269 [10.6"]	1.1 [0.26 USG]
25.1868.65	ø1.5 [0.06"]	ø120 [4.72"]	287 [11.3"]	309 [12.16"]	1.2 [0.52 USG]

25.1865.65 LS10 foamer 3/8M Bsp-1,5mm nzl+1L tank
 25.1866.65 LS10 Foam Lance 1/4M Bsp D.1,5 +tank 2 L
 25.1866.71 LS10 Foam Lance 1/4M Bsp D.2,1 +tank 2 L
 25.1868.65 LS10 foamer 3/8M Bsp-1,5mm nzl+2L tank

25.1868.71 LS10 foamer 3/8M Bsp-2,1mm nzl+2L tank
 25.1869.65 LS10 foamer 1/4F Bsp-1,5mm nzl+2L tank
 25.1869.68 LS10 foamer 1/4F Bsp-1,8mm nzl+2L tank
 25.1869.71 LS10 foamer 1/4F Bsp-2,1mm nzl+2L tank

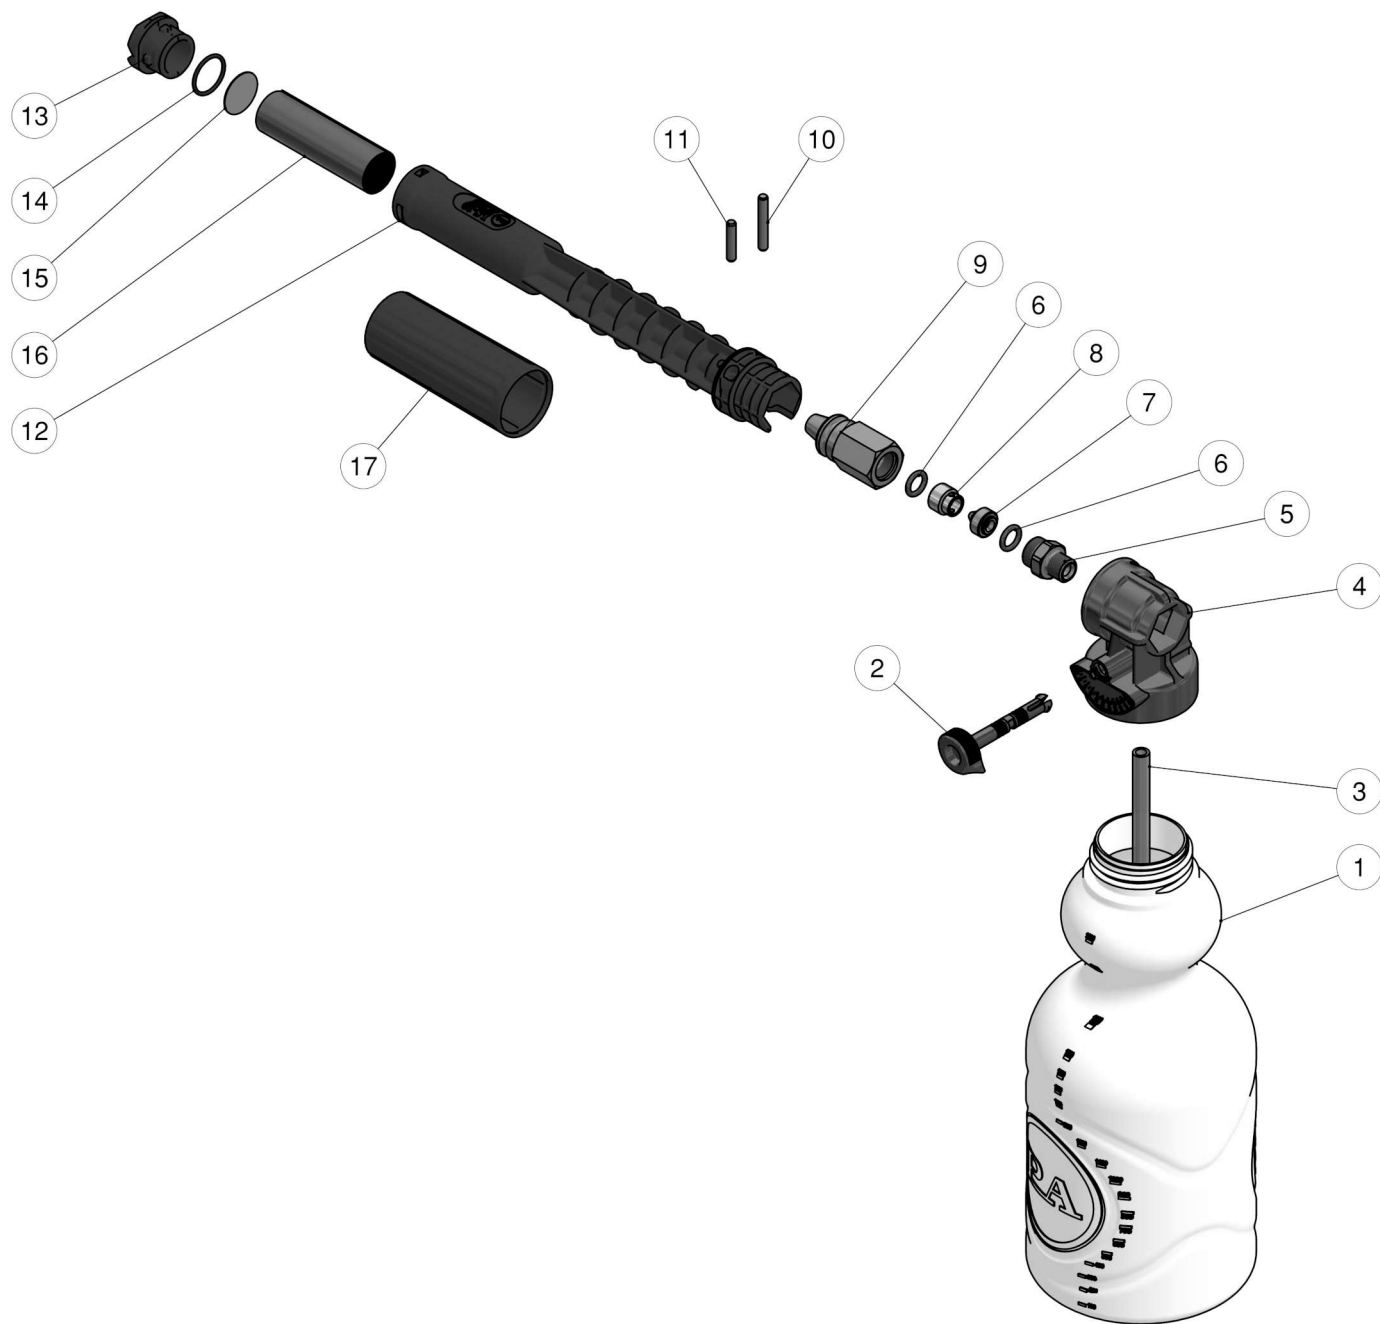

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4
1	14.6507.00R	Tank,L.2,0 round-45 mm inlet (1,2)	1				5
1	14.6506.25R	Tank,L.1,0 roun.45mm inlet (3)	1				10
2	25.1817.84R	Detergent Adjusting Pin	1				10
3	29.0852.85R	Hose, 6x9x270 mm PVC transp. (1,2)	1				10
3	29.0822.85R	Hose, 6x9x230mm PVC transp. (3)	1				10
4	25.1816.84R	Tank holder	1				5
5	13.5024.31R	Nipple, brass 3/8MM Bsp	1				25
5	29.0825.31R	Nipple, 3/8M-1/4F Bsp brass (4,5,6)	1				5
5	25.1867.31R	Coupling 3/8M-1/4M Bsp (7,8)	1				10
6	10.3174.00R	O-ring, 2,62x9,93 mm	2				10
7	21.0505.51R	Inject.nozzle, D.15 - 2,1 mm Sst. (8,6)	1				5
7	21.0504.51R	Inject.nozzle, D.15 - 1,8 mm Sst. (5)	1				5

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4
7	29.0806.51R	Nozzle -LS10, 1,5 mm Sst.	1				5
8	29.0807.51R	Counter-nozzle, Sst.	1				5
9	25.1839.31R	LS 10 Injector body	1				3
10	30.6416.31R	Parallel pin, 5x34 mm brass	1				5
11	30.0509.31R	Parallel pin, 5x24,5 mm brass	1				10
12	25.1838.85R	Casing -LS10 plastic, blue	1				5
13	25.1827.85R	Front Nozzle LS10 plastic blue	1				10
14	10.3072.10R	O-ring, 1,78x20,35 mm Vi 70	1				10
15	29.0802.53R	Diaphragm, 25x0,5 mm Sst.	1				10
16	29.0803.85R	Strainer, PA	1				5
17	25.1828.85R	Cover -LS10 plastic blue	1				5

(1) 25.1868.65 (2) 25.1868.71 (3) 25.1865.65 (4) 25.1869.65 (5) 25.1869.68 (6) 25.1869.71 (7) 25.1866.65 (8) 25.1866.71